


UAC - STANDART AIR COMPRESSOR COOLERS

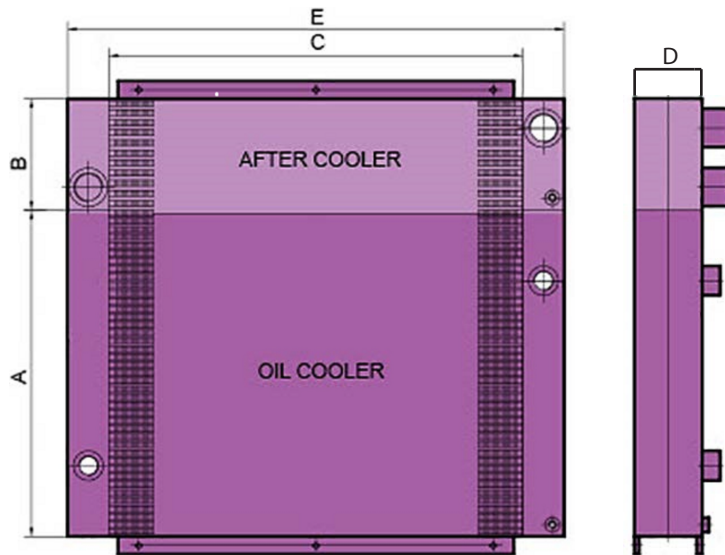

UAC SERIE	UNITS	UAC - 7,5	UAC - 11	UAC - 15	UAC - 22	UAC - 37	UAC - 45	UAC - 55	UAC - 75	UAC - 90	UAC - 110
COMPRESSOR INPUT	KW	0,75	1,1	1,5	22	37	45	55	75	90	110
OIL COOLER CAPACITY	KW	6,3	9,3	12,8	19,2	31,5	38,5	47,4	63,8	76,6	93,5
AIR COOLER CAPACITY	KW	1,1	1,6	2,2	2,8	5,5	6,5	7,6	11,2	13,4	19,5
OIL FLOW	L/min	20	23	30	40	50	60	75	100	125	150
AIR FLOW	M/Min	1,2	1,75	2,4	3,6	6,2	7,7	9,2	13	15,2	19
INLET OIL TEMPERATURE	°C	90	90	90	90	90	90	90	90	90	90
INLET AIR TEMPERATURE	°C	90	90	90	90	90	90	90	90	90	90
COOLING AIR VOLUME	Kg/h	1320	2160	3200	4100	6000	7400	8600	12500	14500	26500
PRESSURE DROP	Pa	120	120	135	170	190	200	300	300	300	220
AMBIENT TEMPERATURE	°C	45	45	45	45	45	45	45	45	45	45
MAX. WORKING PRESSURE	BAR	15									
TEST PRESSURE	BAR	20									
MAX. WORKING TEMPERATURE	°C	120									
DIMENSIONS											
A - OIL COOLER DIMENSION	mm	239	286	290	374	485	516	548	534	649	776
B - AFTERCOOLER DIMENSION	mm	99	99	83	126	146	145	193	261	298	300
C - BLOK DIMENSION	mm	348	398	400	430	530	650	700	850	850	1000
D - THICKNESS	mm	60	60	65	94	113	113	113	113	113	113
E - TOTAL LENGHT	mm	428	478	475	550	670	790	840	990	990	1140
OIL COOLER CONNECTOR	Inch	G1/2"	G1/2"	G1/2"	G1/2"	G1"	G1"	G1"	G1 1/4"	G1 1/4"	G1 1/4"
AFTERCOOLER CONNECTOR	Inch	G1/2"	G1/2"	G1/2"	G1 1/4"	G1 1/4"	G1 1/4"	G1 1/2"	G2"	G2"	G2 1/2"
APP. WEIGHT	Kg	7	8,5	10	22	39	46	59	69	85	105